
# DUTCH HARBOR

## LEGEND

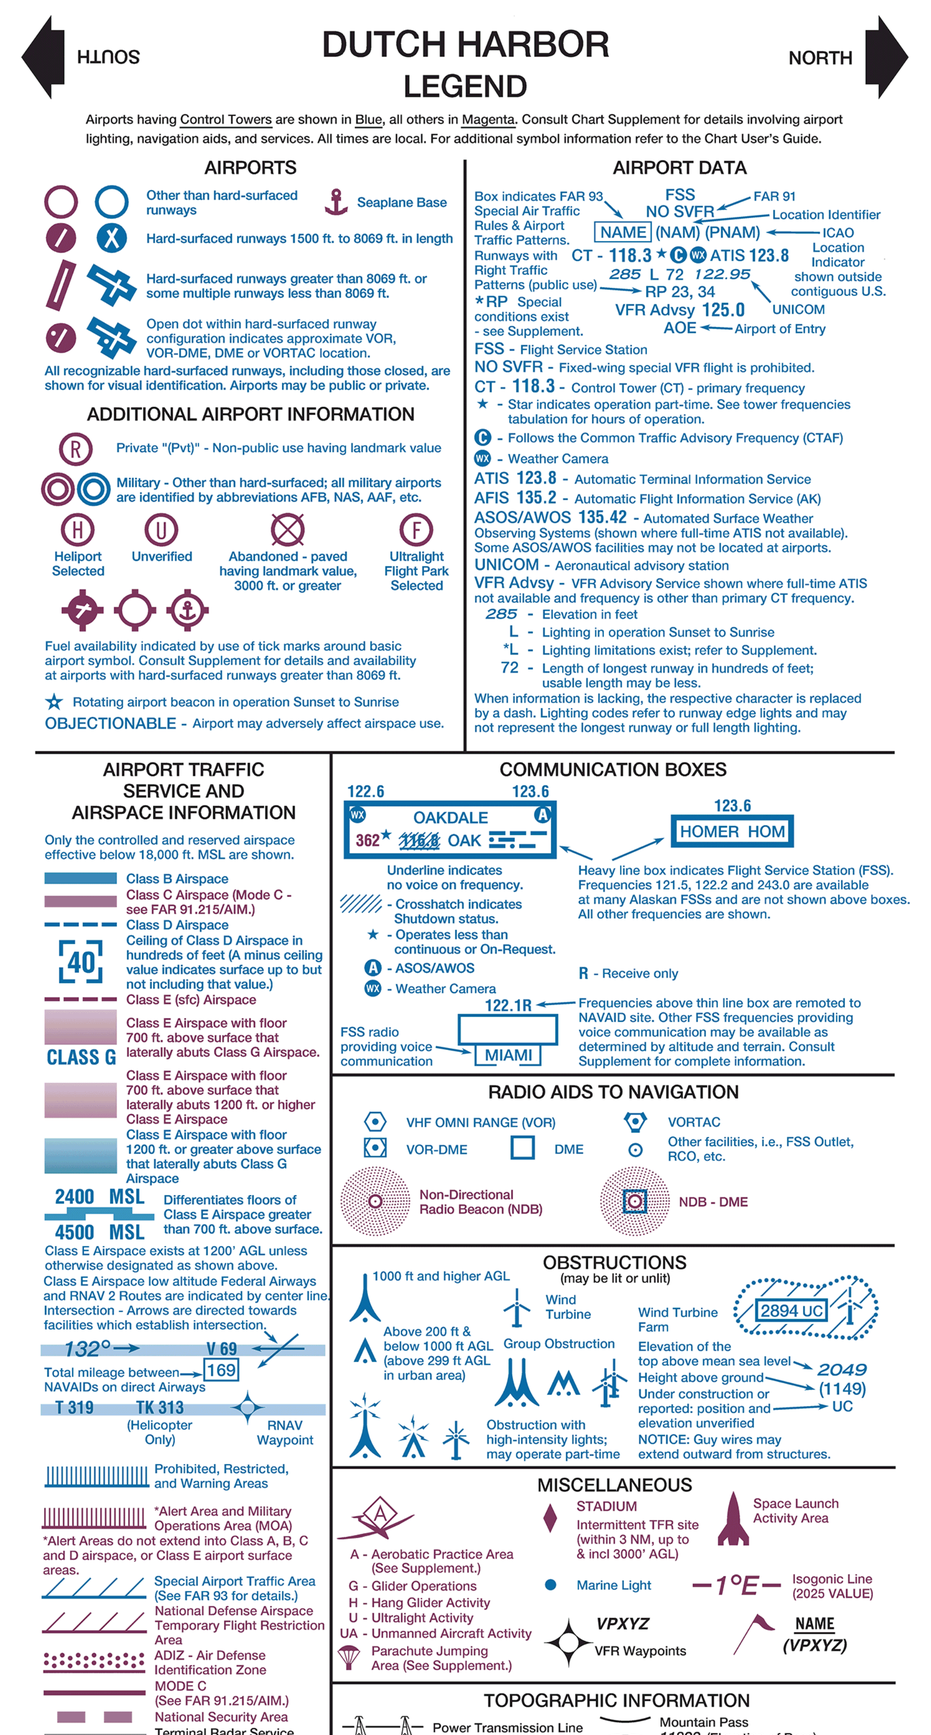


## DUTCH HARBOR SECTIONAL


SECTIONAL AERONAUTICAL CHART SCALE 1:500,000

Federal Aviation Administration

EFFECTIVE 0901Z **19 MAR 2026**
TO 0901Z **14 MAY 2026**

Consult NOTAMs for latest information

Consult/Subscribe to FAA Safety Alerts and Charting Notices at:
http://www.faa.gov/air_traffic/flight_info/aeronav/safety_alerts/

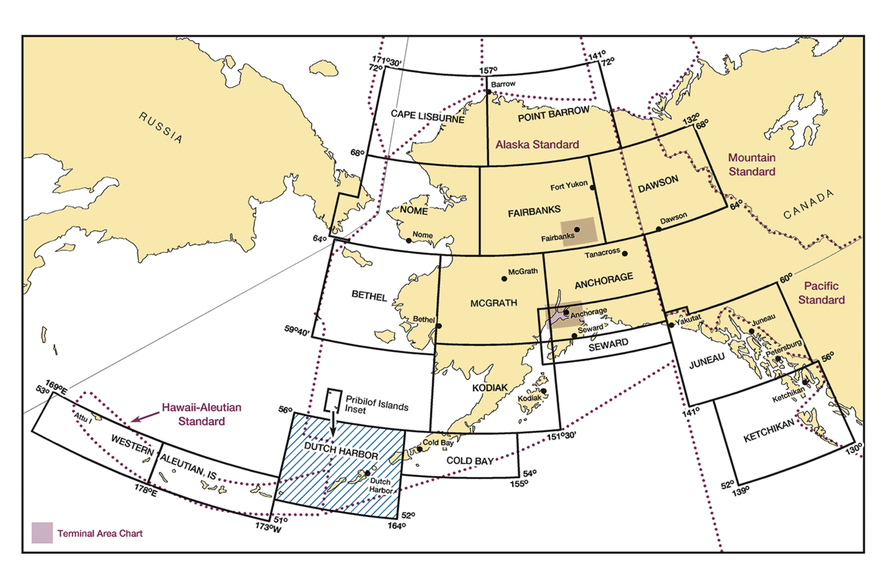


Published from digital files compiled in accordance with Interagency Air Committee specifications and agreements approved by Department of Defense - Federal Aviation Administration.

Warning: Refer to current foreign charts and flight information publications for information within foreign airspace.


FAA Product ID: SDUT
NSN 7641014099788
NGA REF. NO. SECXXDUTCHARBOR
EFF. DATE 26078


### PLOTTING DIRECT ROUTE ON NORTH/SOUTH SIDE

There are approximately two minutes of latitude overlap between the north and south sides of each sectional chart. To plot a course line from one side to the other, the user must first locate two pair of corresponding latitude tick marks, one pair on each side of the chart and follow the steps below.

STEP 1 - Draw a horizontal line (MATCH LINE) between each pair of corresponding latitude tick marks on each side of the chart just to the left or right of where your plot line crosses. (Figure 1)

STEP 2 - Decide which side of the chart has the departure or destination point closer to the edge of the chart. On that side, line up a blank piece of paper along the MATCH LINE (the paper should be completely on the chart, not extending beyond its edge).

STEP 3 - Slide the paper sideways left or right so that a side edge of the paper aligns with the departure or destination point (POINT A). Make a MARK A on edge of the paper where it meets that point.

STEP 4 - Without moving the paper, on the same edge as MARK A, extend a short line on the chart from the corner of the paper where it meets the MATCH LINE out to the edge of the chart. Make that LINE B.

STEP 5 - Turn the chart over and transfer the end of LINE B to the other side, and extend it straight to the MATCH LINE. (Figure 2)

STEP 6 - Take the sheet of paper with MARK A on it and align the (top or bottom) edge of the paper with the MATCH LINE and side edge with LINE B with the bulk of the sheet extending off of the chart. Plot a line from MARK A to the departure or destination point (POINT B).

STEP 7 - Where your plot line crosses the MATCH LINE make a MARK C. Extend a line straight from that mark to the edge of the chart.

STEP 8 - Turn the chart back over and transfer MARK C to that side and extend it to the MATCH LINE. Plot a line from MARK C to the destination. (Figure 3)

### MILITARY TRAINING ROUTES (MTRs)

All IR and VR MTRs are shown, and may extend from the surface upwards. Only the route centerline, direction of flight along the route, and the route designator are depicted - route widths and altitudes are not shown.

DoD users refer to Area Planning AP/1B Military Training Routes North and South America for current routes.

**CAUTION: Severe turbulence may occur over rugged terrain. See AIM.**

Features normally used as checkpoints for controlling VFR traffic are emphasized on this series of charts so they may be readily identified.

Example: POWER PLANT

The name shown is that used by the controlling personnel and is not necessarily the official name of the feature.

### REGULATIONS REGARDING FLIGHTS OVER CHARTED NATIONAL PARK SERVICE AREAS, U.S. FISH AND WILDLIFE SERVICE AREAS, AND U.S. FOREST SERVICE AREAS

CAUTION: Before landing fixed-wing aircraft on the lands or waters within the boundaries of lands administered by the National Park Service (NPS) and U.S. Fish and Wildlife Service (FWS), pilots should check with the respective agencies for any closures that may be in effect. The landing of helicopters is prohibited on the lands and waters within the boundaries of the lands administered by the NPS, FWS, or U.S. Forest Service (USFS) Wilderness areas. Contact information for all these areas in Alaska can be found in the chart margin. For contact information for all these areas in Alaska, see Supplement (Area Notices).

All aircraft are requested to maintain a minimum altitude of 2,000 feet above the surface of lands and waters administered by the NPS, FWS, or USFS Wilderness areas. FAA Advisory Circular (AC) 91-36, "Visual Flight Rules (VFR) Flight Near Noise Sensitive Areas," defines the surface as: the highest terrain within 2,000 feet laterally of the route of flight, or the uppermost rim of a canyon or valley.

Pilots are warned that it is unlawful at any altitude to use an aircraft to harass any wildlife (16 USC 742j-1; 50 CFR Part 19). Harass is defined to mean disturb, worry, molest, rally, concentrate, harry, chase, drive, herd or torment.

Alaska Maritime NWR - Homer, AK - (907) 235-6546
Izembek NWR - Cold Bay, AK - (907) 532-2445

Boundary of National Park Service areas, U.S. Fish and Wildlife Service areas, U.S. Forest Service areas.

### REPORTING CHART ERRORS

You are requested to inform us of chart errors and/or additions that come to your attention while using this chart. See the frequently asked questions (FAQs) on our website at http://faa.gov/go/ais/ prior to contacting us via toll free number at 1-800-638-8972 or visit https://www.faa.gov/air_traffic/flight_info/aeronav/aero_data/ or mail to: FAA, Aeronautical Information Services,1305 East-West Highway, SSMC 4, Suite 4400, Silver Spring, MD 20910-3281.

For weather camera information visit https://weathercams.faa.gov

FOR PROCUREMENT: For digital products, visit http://www.faa.gov/air_traffic/flight_info/aeronav/digital_products/ For a list of approved FAA Print Providers, visit our website at: http://www.faa.gov/air_traffic/flight_info/aeronav/print_providers/


**Flight Following Services are available on request and highly recommended in and around Class B, C, and TRSA areas.**

Class G Airspace within the United States extends up to 14,500 feet MSL. At and above this altitude all airspace is within Class E Airspace, excluding the airspace less than 1500 feet above the terrain and certain special use airspace areas.

### NORTH AMERICAN AEROSPACE DEFENSE COMMAND (NORAD) PROCEDURES

All aircraft operating in the U.S. national airspace, if capable, will maintain a listening watch on guard frequencies VHF 121.5 or UHF 243.0. It is incumbent upon all aviators to know and understand their responsibilities if intercepted. Review "AIM" section 5-6-13 for intercept procedures. Additionally, if U.S. military fighter jets intercept an aircraft and flares are dispensed in the area of that aircraft, aviators will pay strict attention, contact air traffic control immediately on the local frequency or on VHF guard 121.5 or UHF 243.0 and follow the interceptor visual ICAO signals. Be advised that non-compliance may result in the use of force.

**Lambert Conformal Conic Projection Standard Parallels 49° 20′ and 54° 40′**
**Horizontal Datum: North American Datum of 1983 (World Geodetic System 1984)**





CONTOUR INTERVAL 1000 feet
Intermediate contours 500 feet
Auxiliary contours 250 feet

HIGHEST TERRAIN elevation is 9414 feet located at 54° 45′N - 163° 58′W

Spot elevation. . . . . . . . . . . . . . . . . . 4254
Approximate elevation. . . . . . . . . . . . x 3200

CONVERSION OF ELEVATIONS

FEET (Thousands) 0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30
METERS (Thousands) 0 1 2 3 4 5 6 7 8 9

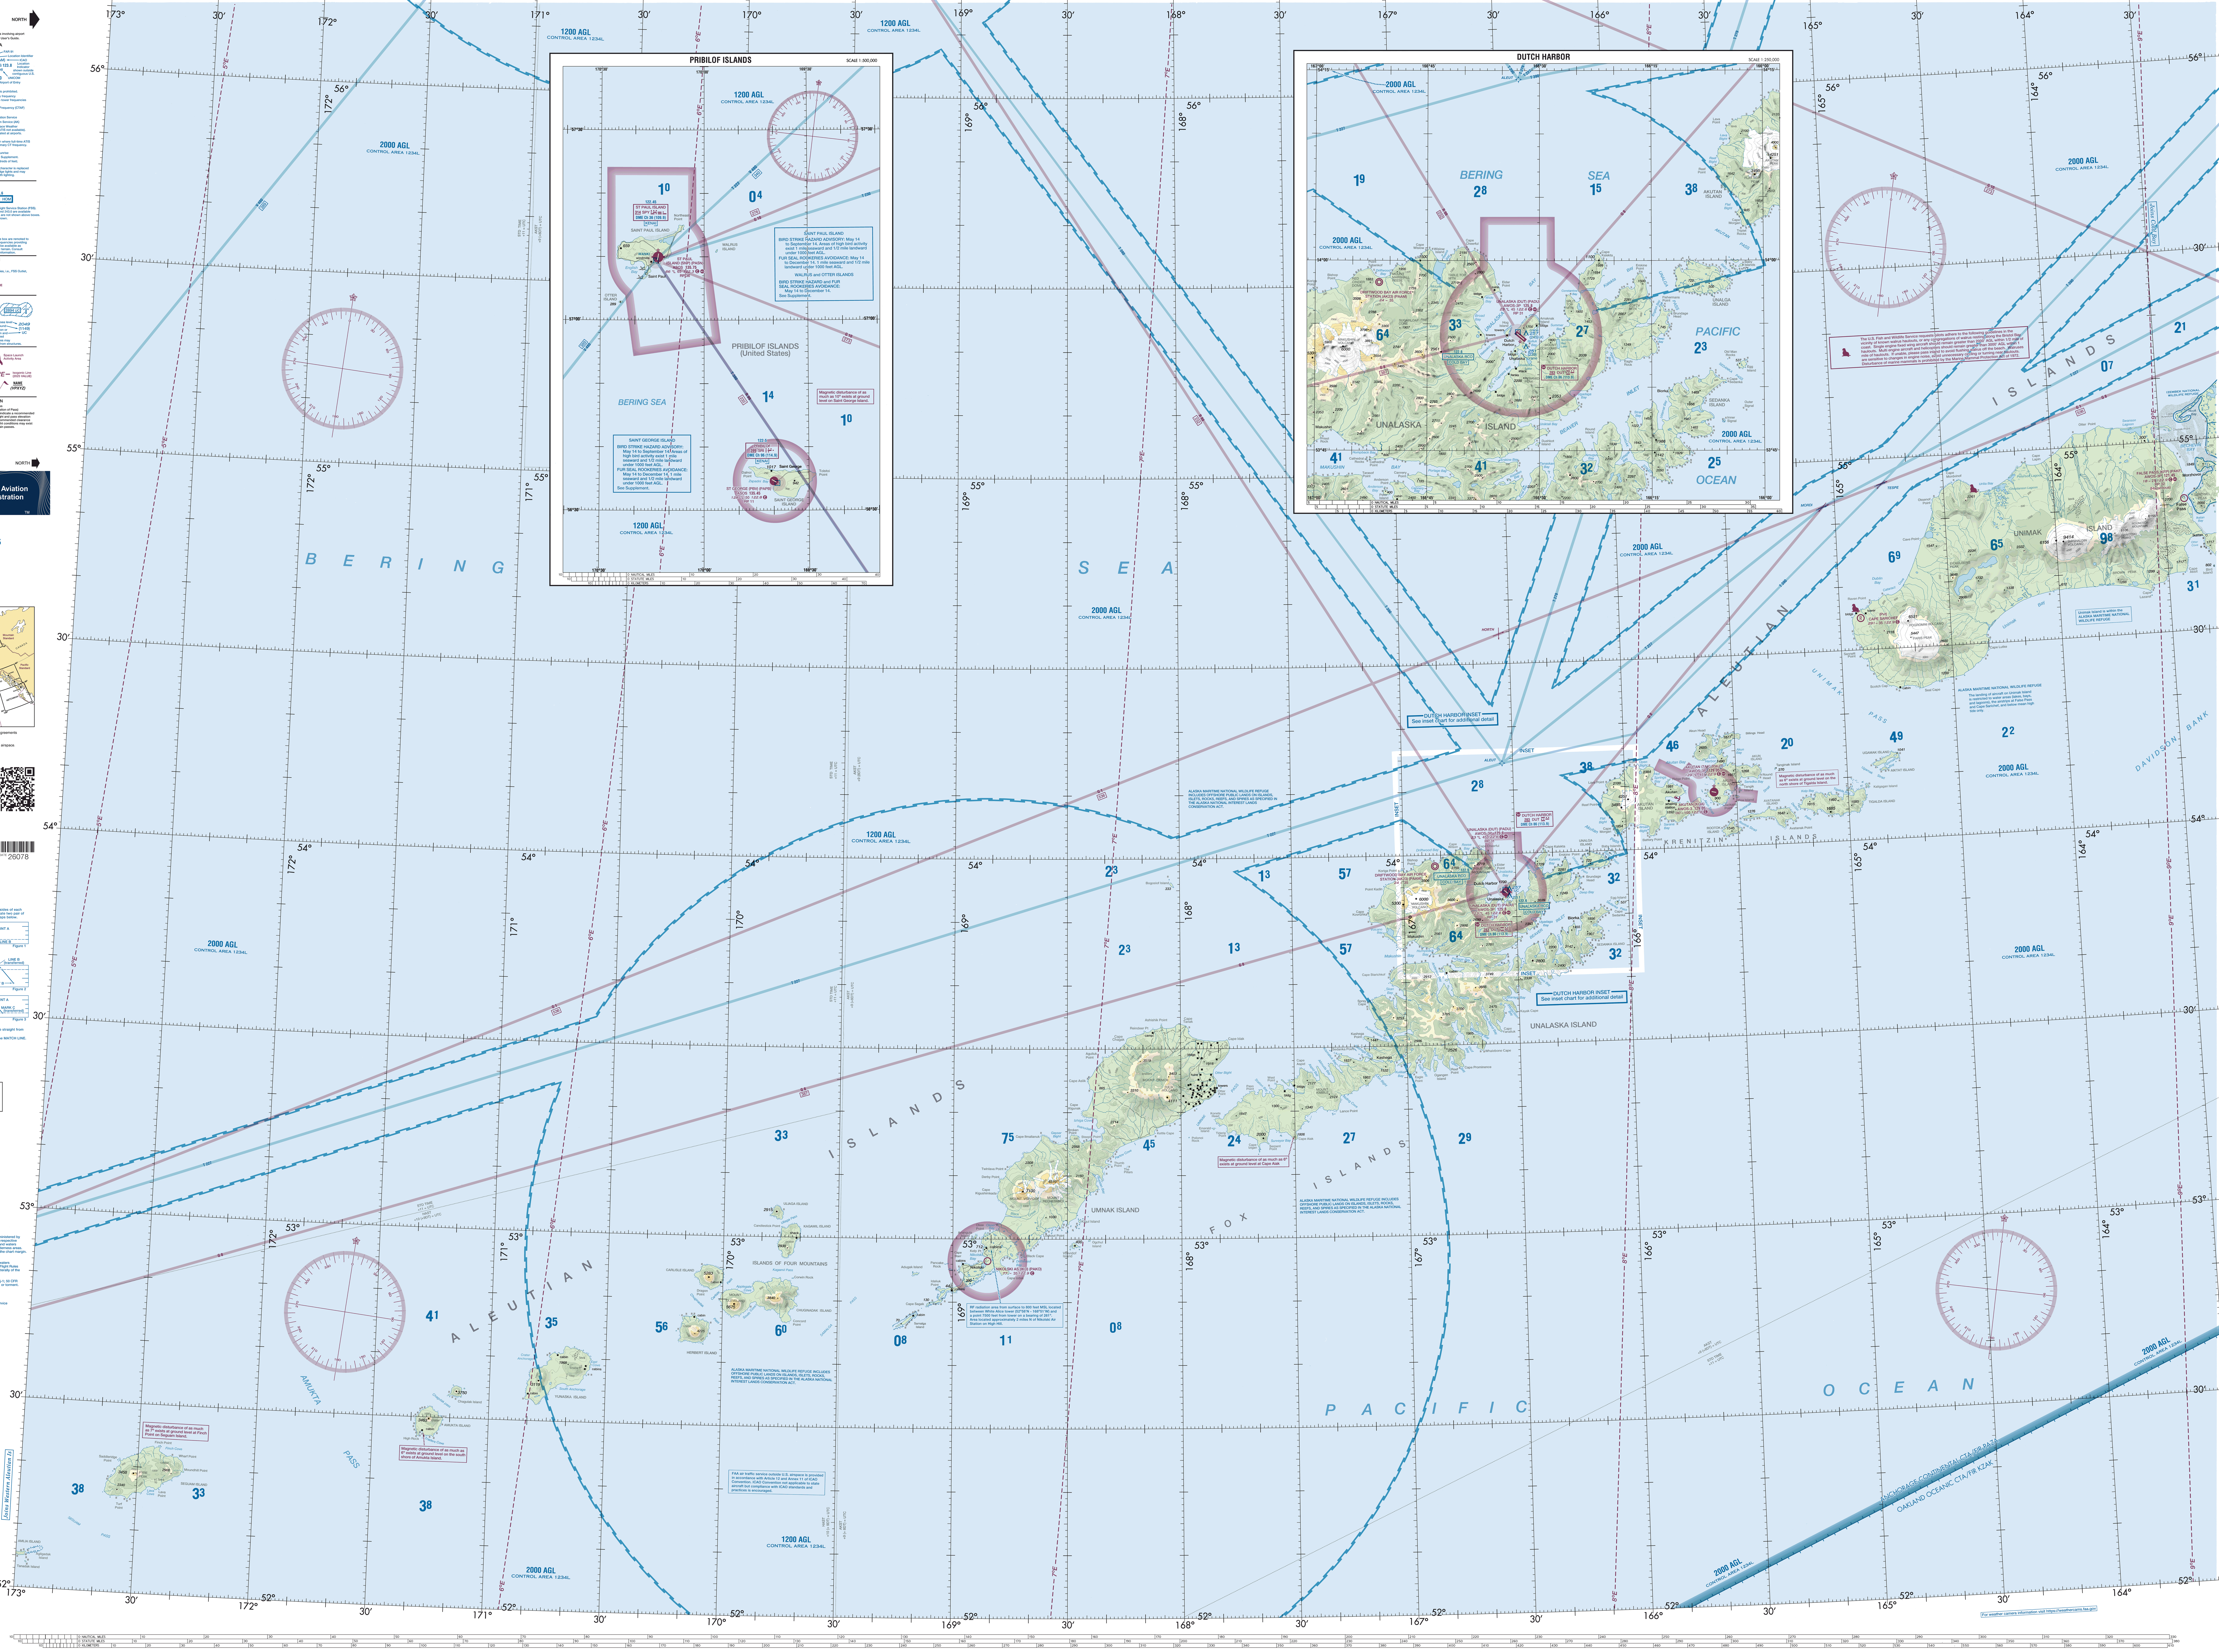


**CAUTION: This chart is primarily designed for VFR navigational purposes and does not purport to indicate the presence of all power transmission and telecommunication lines, terrain or obstacles which may be encountered below reasonable and safe altitudes.**

CAUTION: Unmanned Aircraft Systems (UAS) may be approved to operate above critical infrastructure including obstacles and linear features such as high-voltage powerlines, pipelines and railroads. Check NOTAMs and see AIM for details.

ATTENTION

THIS CHART CONTAINS MAXIMUM ELEVATION FIGURES (MEF). The Maximum Elevation Figures shown in quadrangles bounded by ticked lines of latitude and longitude are represented in THOUSANDS and HUNDREDS of feet above mean sea level. The MEF is based on information available concerning the highest known feature in each quadrangle, including terrain and obstructions (trees, towers, antennas, etc.).

Example: 12,500 feet . . . . . . . . . . . . . . . . . . . . . 12[5]